

Polyform® Aqua Series



Proudly made by
The Originator of
Modern Plastic Buoys

POLYFORM® OF NORWAY

The Aqua 600, configured for fish farming/aquaculture, is made from a rotomolded PE outer shell and filled with polystyrene (EPS) foam, guaranteeing a compressive strength of 5 mH₂O and a density of 25kg /m³. The continuous high quality chain is terminated at either end of the buoy by use of hot dip galvanized steel terminating discs that are designed to prevent damage to the buoy. The chain is easily attached by shackle to the anchor line. All wear parts are standard components and can easily be replaced. Aqua-series buoys are designed for surface use and they are equipped with four yellow, daylight reflective tapes for better visibility. Armature and also a radar reflector can be supplied on demand and can also be mounted afterwards.

Polyform AS

Polyform AS is a world leading manufacturer of buoys fenders and floats, and the originator of the modern inflatable plastic buoy. The company is registered in Norway and situated in Ålesund at the north-western coast of Norway, and benefits from being located in one of the world's most innovative maritime environments.


The product range of Polyform AS consists of:

- Inflatable buoys and fenders made from soft Vinyl plastics.
- Purse Seine Floats, buoys and marina fenders made from BACELL closed cell foam.
- Hard-shell buoys and pontoon floats made from PE and filled with foam

POLYFORM AS
Tverrvegen 37
N-6020 Ålesund
Norway

+47 70 17 25 50
+47 70 14 76 36
mail@polyform.no
www.polyform.no

Product information

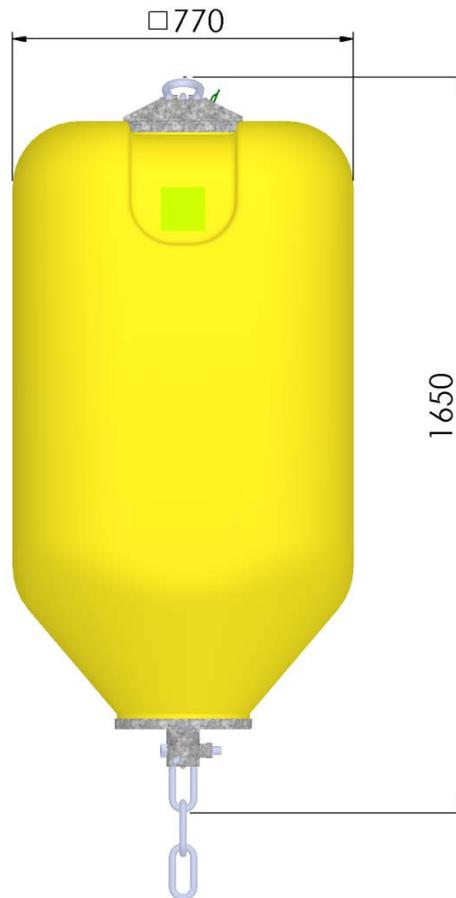

| Article number | Aqua 600 |
|-------------------------|----------|
| Length | 770 mm |
| Width | 770 mm |
| height | 1650 mm |
| Weight (nominal) | 55 Kg |
| Gross volume | 620 L |
| Buoyancy | 560 Kg |
| Recommended normal load | 280 Kg |

Technical Information

| | |
|---------------------------------------|-----------------------|
| Breaking load Chain | 260 KN |
| Breaking load Shackle | 280 KN |
| Buoy body material description | |
| Material | LLPE |
| Hardness, shore D | 57 |
| Tensile strength | 17,5 MPa |
| Ultimate Elongation | 650% |
| Recommended min temp. | -25°C |
| Recommended max temp. | 40°C |
| Temp. not to be exceeded | 50°C |
| Specific gravity | 0,94 |
| Foam core material description | |
| Material | EPS |
| Density | >25 Kg/m ³ |
| Compressive strength | 50 KPa |

PRODUCT CERTIFICATE



Complies with the requirements for strength and safety according to **Marine fish farms NS9415** (Norwegian Standard)

For all measurements, weights and other technical data specified in this data sheet, please allow for a deviation of not less than +/-5%. The illustration may deviate from the actual product.